


- F-529-7RYCB Finish(B)
- F-529-7RYCC Finish(C)
- F-529-7RYCGS Finish(GS)

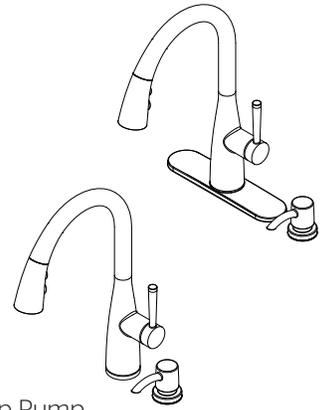

Specifications

Features

- 1.8 GPM Flow Rate
- 1, 2, 3 or 4-Hole Installation; Deckplate or Single Hole Mounting Option Included
- 3 Function Pull-Down Sprayer (Spray, Stream, and Pause)
- 360° Rotating Spout
- AccuDock™ Sprayhead Docking
- High Arc Spout
- Quick Install Tool
- Mounting Hardware Included
- Easy to Clean Nozzles
- TiteSeal™ Technology
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)




Dimensions

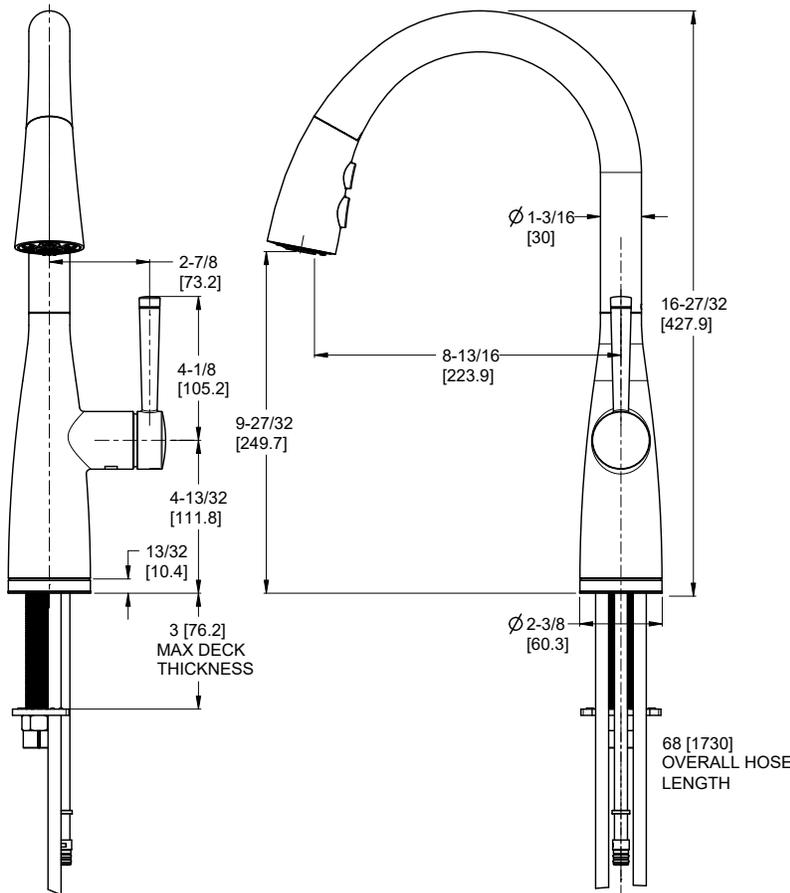


$\text{Ø}1\text{-}3/8$ Min to $\text{Ø}1\text{-}1/2$ Max. Deck Hole Openings

Optional Included Deckplate



Top Filling Soap Dispenser

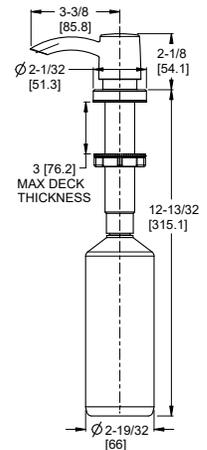

36 Inch Supply Lines with $3/8$ Female Compression Brass Connections

